
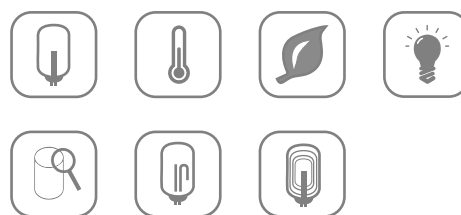


# ST/STU

50-80-100-120-150-200

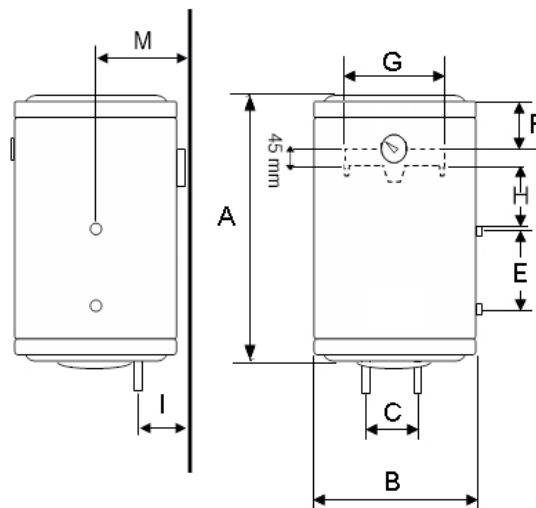

Models	A mm	B mm	C mm	E mm	F mm	G mm	H mm	I mm	M mm	S mq
<b>ST 50</b>	510	460	100	175	130	350	20	130	240	0,197
<b>ST 80</b>	700	460	100	265	130	350	40	130	240	0,258
<b>ST 100</b>	805	460	100	265	160	350	180	130	240	0,258
<b>ST 120</b>	1000	460	100	265	170	350	340	130	240	0,258
<b>ST 150</b>	935	550	140	350	180	350	140	130	285	0,296
<b>ST 200</b>	1105	550	140	350	180	350	280	130	285	0,296
<b>STU 80</b>	700	460	100	265	130	350	40	130	240	0,258
<b>STU 100</b>	805	460	100	265	160	350	180	130	240	0,258

Models	Thermal Dispersion 65° (Kwh/24h)	Power Watts*	Voltage Volts	Heating Time dt 50°C	Max Temperature C°	Max Pressure (bar)	Humidity Protection	Class Insul.	Profile	Energy Class
<b>ST 50</b>	0,99	1200	230	170'	75	8	IPX4	I	M	C
<b>ST 80</b>	1,32	1200	230	260'	75	8	IPX4	I	M	C
<b>ST 100</b>	1,51	1500	230	245'	75	8	IPX4	I	M	C
<b>ST 120</b>	1,84	1500	230	315'	75	8	IPX4	I	L	C
<b>ST 150</b>	2,09	2000	230	416'	75	8	IPX4	I	XL	C
<b>ST 200</b>	2,42	2000	230	500'	75	8	IPX4	I	XL	C
<b>STU 80</b>	1,32	1200	230	260'	75	8	IPX4	I	M	C
<b>STU 100</b>	1,51	1500	230	245'	75	8	IPX4	I	M	C